
TECHNICAL SPECIFICATION

ATREYO®
SOLUTIONS THAT SIMPLIFY

4 inputs 4 outputs
Modbus I/O expander

AMB-4I-4O

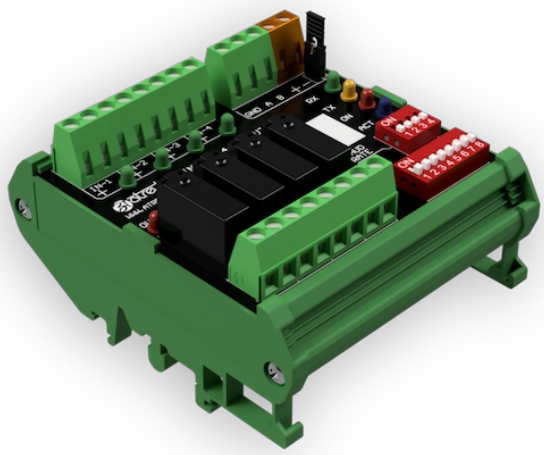

Features

- **4×30V DC digital inputs**
- **4×NO relay outputs**
- **Baud rate 9600 to 128000**
- **Modbus addresses: 1 to 247**
- **RX/TX and activity indicators**
- **Powered 8-36V DC or AC**
- **DIN rail mounting**
- **Compact size**

The AMB-4I-4O input/output expander with Modbus RTU interface. It has 4 isolated digital inputs with voltage range up to 30VDC and 4 relay output with 7A 230V range and NO contacts. The power supply range is 8 to 36V and accept DC or AC voltage. The use of DC / DC technology for supplying relays enables a wide range of supply voltages.


Description	Parameter
Serial interface	
Interface Type	RS485
Data Rate	9600, 14400, 19200, 28800, 38400, 57600, 115200, 128000 bps
Signals	A, B and GND
Data Length	8 bits
Parity	None
Stop Bits	1
Baudrate setting	4 way DIP switch
Address setting	8 way DIP switch
Connector	Screw connector, 28÷12AWG / 2.52mm
Digital inputs	
Input number	× 4
Input type	Opto-isolated 1.5kV
Configuration	Every input separate
VIN_{max}	30V DC

Description	Parameter
Digital inputs	
Logic 1 voltage range	3V to VIN_{max}
Connector	Screw connector, 28÷12AWG / 2.52mm
Digital outputs	
Output number	× 4
Configuration	Potential free, relay NO
Voltage and Load	7A 230V AC and 7A 30V DC
Connector type	Screw connector, 28÷12AWG / 2.52mm
Indicators	
Inputs indicators	× 4 ø3mm LED green
Outputs indicators	× 4 ø3mm LED yellow
RX/TX	× 2 ø3mm LED yellow/green
Power	× 1 ø3mm LED red
Activity	× 1 ø3mm LED blue

Description	Parameter
Power supply	
Supply voltage	8-30V DC or 8-24V AC
Power consumption	1.3W (all relay ON) 0.3W (relays off)
Connector type	Screw connector, 28÷12AWG / 2.52mm
Physical characteristics	
Installation	DIN-Rail mounting

Description	Parameter
Housing	PVC
Dimensions (L×W×H)	80mm × 90mm × 50mm
Weight	110g
Environmental specification	
Operating temp.	-10 ~ 75°C (-14 ~ 167°F)
Storage temp.	-40 ~ 85°C (-40 ~ 185°F)
Ambient RH	5% ~ 95% (non-condensing)

Expander

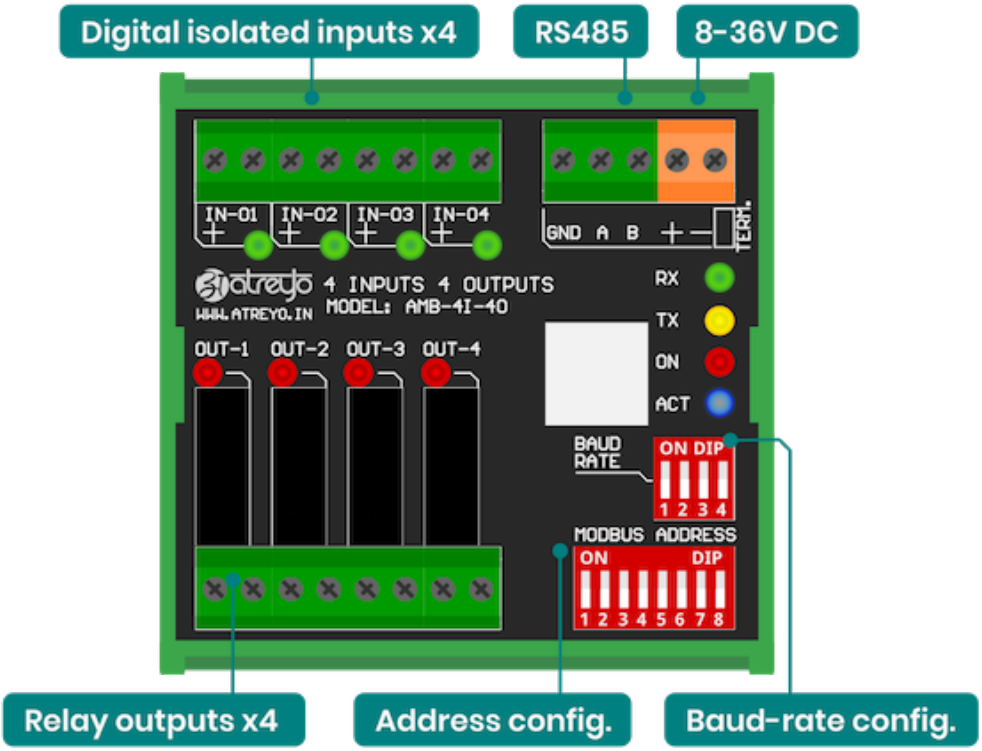

Standard package list

1 AMB-4I-4O

Please note: The set does not include a power supply.

For more details scan or click on QR code

Copyright

Copyright © 2026 Atreyo Research and Development Pvt. Ltd. This technical specification is protected under national and international copyright laws. No part of this user manual may be reproduced, distributed, translated, or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or storing in any information storage and retrieval system, without the prior written permission of Atreyo Research and Development Pvt. Ltd. Copy or use any part of this specifications is prohibited without the prior written permission from the Atreyo Research and Development Pvt. Ltd.

Trademarks

Atreyo and the Atreyo logo are registered trademarks of Atreyo Research and Development Pvt. Ltd.
All other trademarks and copyrights are the property of their respective owners.

Disclaimer

- The information contained in this Technical Specification is provided "as is" and is subject to change without notice. While every effort has been made to ensure the accuracy and completeness of the information contained herein, Atreyo Research and Development Pvt. Ltd. assumes no responsibility or liability for any errors or omissions.
- Images used in this specification may differ in appearance from the actual product.
- All dimensions mentioned in the drawings are not to scale and are subject to change and update as may be decided by the Atreyo Research and Development Pvt. Ltd.
- Atreyo Research and Development Pvt. Ltd. makes no warranties, either express or implied, regarding the contents of this document, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.
- Users of this Technical Specification should verify the applicability and suitability of the information and procedures to their particular use. Atreyo Research and Development Pvt. Ltd. shall not be liable for any damages, including but not limited to direct, indirect, special, incidental, or consequential damages, arising from or related to the use or inability to use this Technical Specification or the products described herein.
- By using this Technical Specification, you agree to the terms and conditions stated above. Atreyo Research and Development Pvt. Ltd. has right to make additions, deletions, alterations or amendments as and when it deems fit and proper, without any prior notice.

Atreyo Research & Development Pvt. Ltd.	**+91 9727741417** **info@atreyo.in**	2106, Z2, Thaltej, Ahmedabad, Gujarat, India