
TECHNICAL SPECIFICATION

ATREYO®
SOLUTIONS THAT SIMPLIFY

High voltage 16 inputs
Modbus input expander

AMB-16I-AC

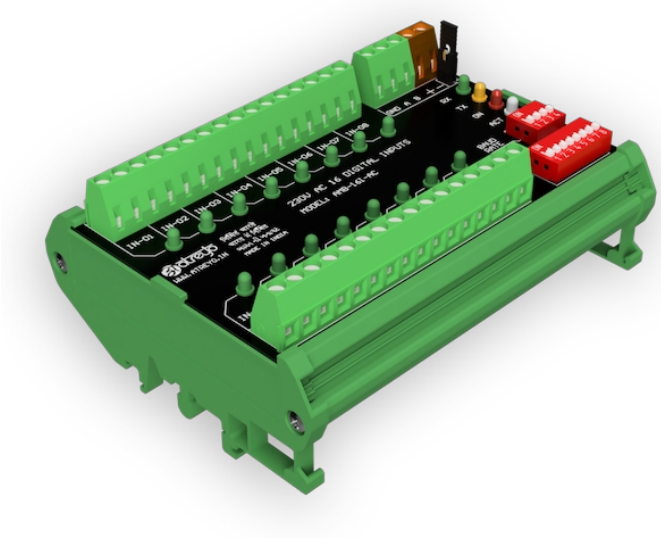

Features

- **16 × 60-500V DC/AC digital inputs**
- **Baud rate: 4800 – 128000**
- **Modbus addresses: 1 to 247**
- **RX/TX and activity indicators**
- **Powered 8-36V DC or 8-24VAC**
- **DIN rail mounting**

Digital isolated input expander to Modbus RTU with high voltage range of inputs - 60V AC to 500V AC. The input also accepts DC voltage within the same range. Used when it is necessary to detect the presence of high voltage in electrical panels. The power supply accepts either DC or AC voltage and has a range of 8 to 36V.


Description	Parameter
Serial interface	
Interface type	RS485
Data rate	4800, 9600, 14400, 19200, 28800, 38400, 57600, 115200, 128000 bps
Signals	A, B and GND
Data length	8 bits
Parity	None
Stop Bits	1
Baudrate setting	4 way DIP switch
Address setting	8 way DIP switch
Connector	Screw connector, 28÷12AWG / 2.52mm
Digital inputs	
Input number	× 16
Input type	Opto-isolated 2.5kV
Configuration	Every input separate
VIN_{max}	500V AC or 500V DC

Description	Parameter
Digital inputs	
Logic 1 voltage range	60V to VIN_{max}
Connector	Screw connector, 28÷12AWG / 2.52mm
Indicators	
Inputs indicators	× 16 ø3mm LED green
RX/TX	× 2 ø3mm LED yellow/green
Power	× 1 ø3mm LED red
Activity	× 1 ø3mm LED blue
Power supply	
Supply voltage	8-36V DC or 8-24V AC
Power consumption	0.4W
Connector type	Screw connector, 28÷12AWG / 2.52mm
Physical characteristics	
Installation	DIN-Rail mounting
Housing	PVC
Dimensions (L×W×H)	120mm × 90mm × 50mm

Description	Parameter
Physical characteristics	
Weight	140g
Environmental specification	
Operating temp.	-10 ~ 75°C (-14 ~ 167°F)

Description	Parameter
Environmental specification	
Storage temp.	-40 ~ 85°C (-40 ~ 185°F)
Ambient RH	5% ~ 95% (non-condensing)

Expander

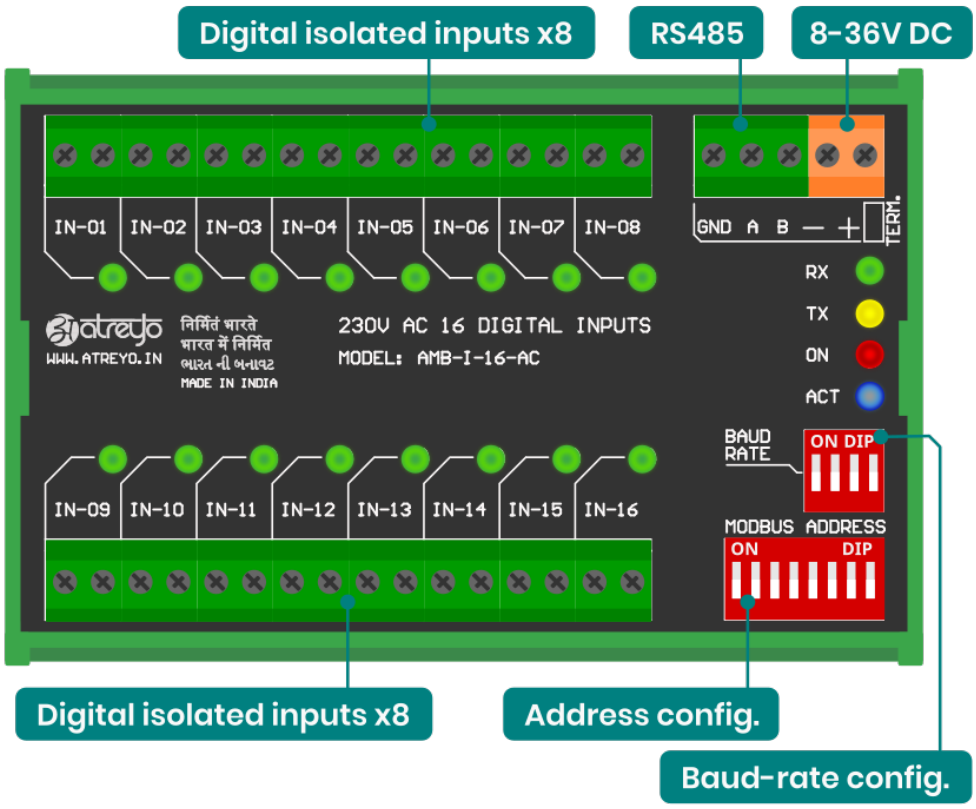

For more details scan or click on QR code

Copyright

Copyright © 2026 Atreyo Research and Development Pvt. Ltd. This technical specification is protected under national and international copyright laws. No part of this user manual may be reproduced, distributed, translated, or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or storing in any information storage and retrieval system, without the prior written permission of Atreyo Research and Development Pvt. Ltd. Copy or use any part of this specifications is prohibited without the prior written permission from the Atreyo Research and Development Pvt. Ltd.

Trademarks

Atreyo and the Atreyo logo are registered trademarks of Atreyo Research and Development Pvt. Ltd.
All other trademarks and copyrights are the property of their respective owners.

Disclaimer

- The information contained in this Technical Specification is provided "as is" and is subject to change without notice. While every effort has been made to ensure the accuracy and completeness of the information contained herein, Atreyo Research and Development Pvt. Ltd. assumes no responsibility or liability for any errors or omissions.
- Images used in this specification may differ in appearance from the actual product.
- All dimensions mentioned in the drawings are not to scale and are subject to change and update as may be decided by the Atreyo Research and Development Pvt. Ltd.
- Atreyo Research and Development Pvt. Ltd. makes no warranties, either express or implied, regarding the contents of this document, including but not limited to the implied warranties of merchantability and fitness for a particular purpose.
- Users of this Technical Specification should verify the applicability and suitability of the information and procedures to their particular use. Atreyo Research and Development Pvt. Ltd. shall not be liable for any damages, including but not limited to direct, indirect, special, incidental, or consequential damages, arising from or related to the use or inability to use this Technical Specification or the products described herein.
- By using this Technical Specification, you agree to the terms and conditions stated above. Atreyo Research and Development Pvt. Ltd. has right to make additions, deletions, alterations or amendments as and when it deems fit and proper, without any prior notice.

Atreyo Research & Development LLP	**+91 9727741417** **info@atreyo.in**	2106, Z2, Thaltej, Ahmedabad, Gujarat, India